

Fig. 1B



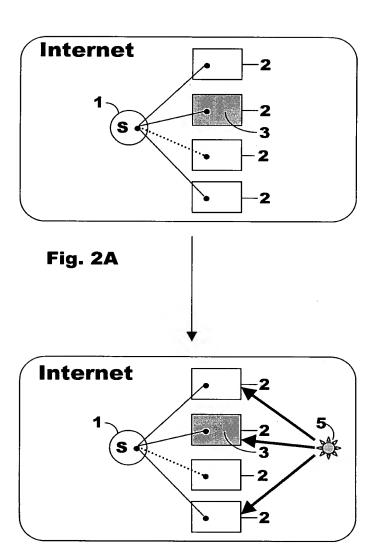


Fig. 2B



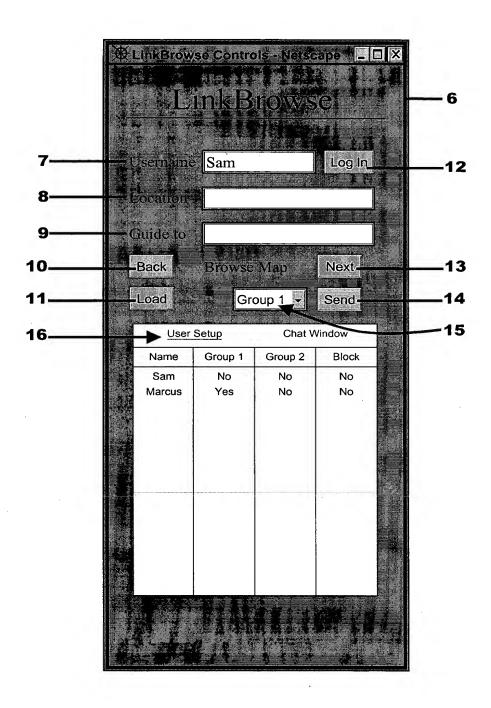


Fig. 3


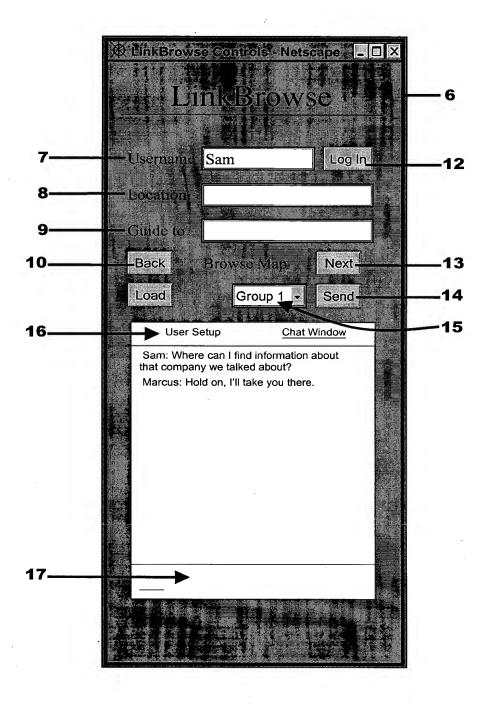


Fig. 4



Daisy-chain BrowseMap:



Each link is a bi-directional connection

Fig. 5

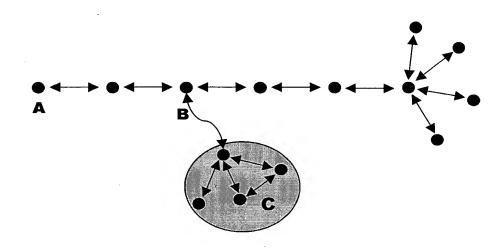


Fig. 6



STEP 100

Browser Program—	URL requested by client	→Web server
		LinkBrowse Server

CLIENT SERVER

STEP 110

Browser Program◀	Web server sends HTML	—Web server
Blowsel Flogram	login page with embedded	Web server
	JavaScript functions	LinkBrowse Server

CLIENT SERVER

STEP 120

Browser program runs login applet	Web server LinkBrowse Server
CLIENT	SERVER

Fig. 7A



STEP 130

Login applet executes security checks with LinkBrowse Server◀	Web server ➤LinkBrowse Server
CLIENT	QEDVED.

STEP 140

CLIENT	SERVER
(LinkBrowse controls)	LinkBrowse Server
Login applet opens new browser window	Web server

STEP 150

CLIENT		SERVER
applet	with LinkBrowse server	►LinkBrowse Server
LinkBrowse controls	Communication applet establishes a connection	Web server

STEP 160



CLIENT SERVER



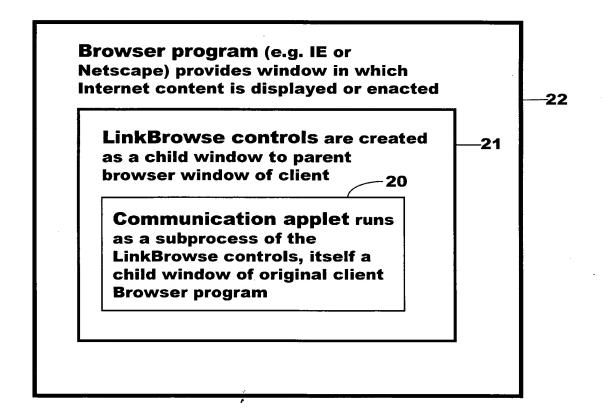


Fig. 8

STEP 200



STEP 210



STEP 220

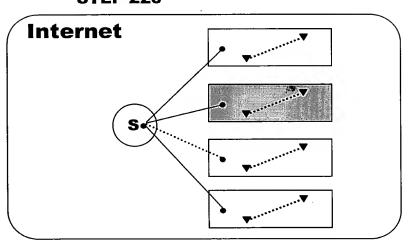


Fig. 9



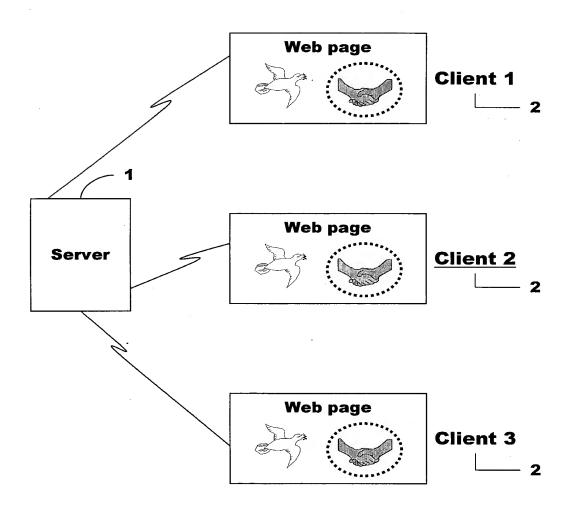


Fig. 10